





# Double Kote Digital


Narrow Format

Equipment

The Double Kote Digital is a two sided laminating system designed for digital output and other prints up to 20" x 25." This compact system includes a sheet feeder, laminator and cutter that is capable of processing films thicker than 1.3 mil. The Double Kote Digital offers fast setup times and easy operation, making it ideal for short-run, on demand finishing projects.

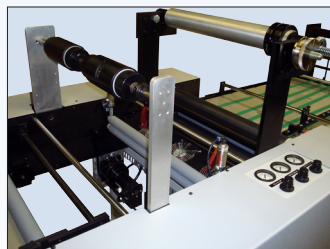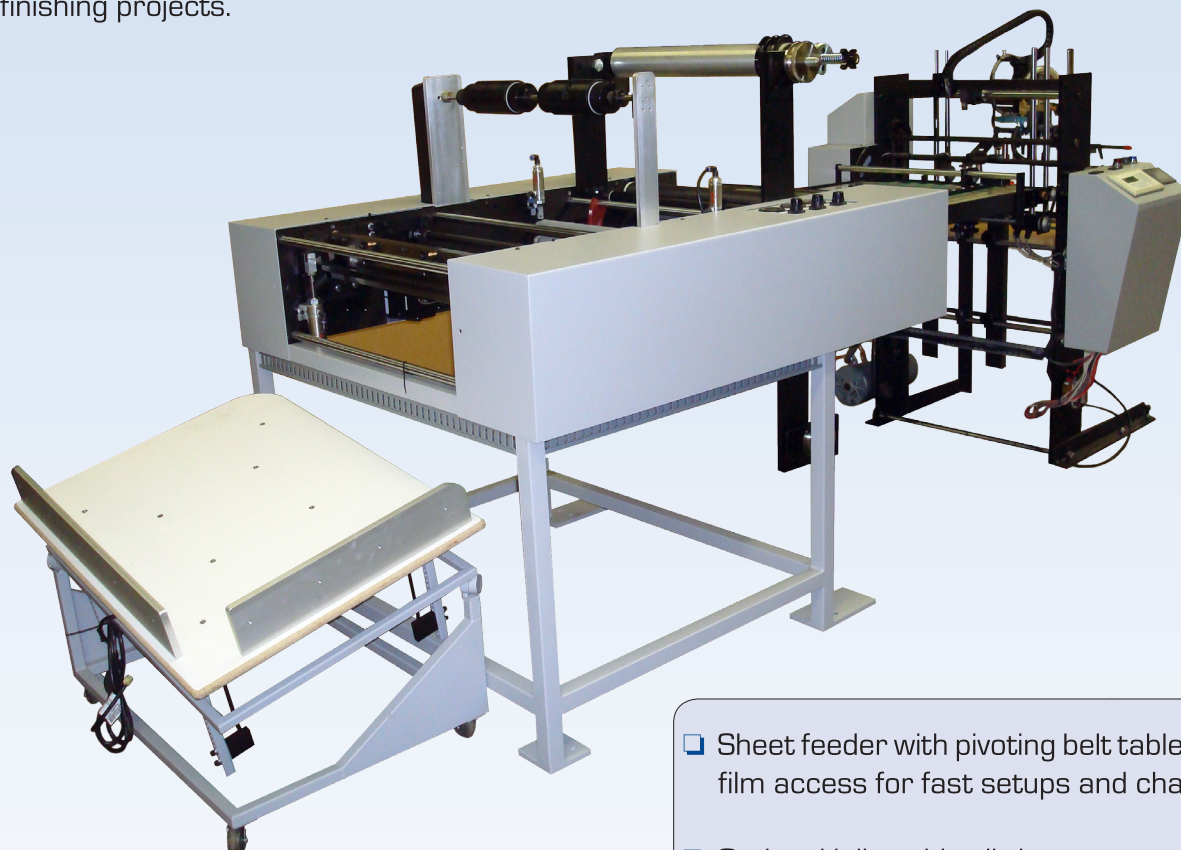


Optional Takeup Mandrel  
for Inline Side Slitting

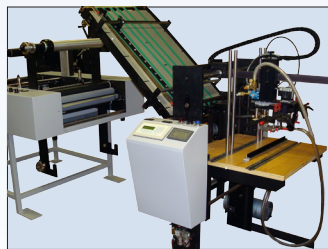

Sheet Feeder With Pivoting  
Belt Table



Digital Control Panel

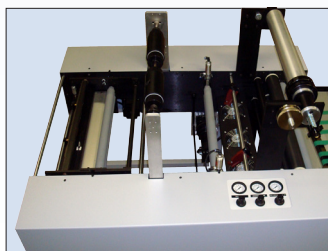

Heavy Duty Guillotine Cutter

- ❑ Sheet feeder with pivoting belt table offers easy film access for fast setups and changeovers.
- ❑ Optional inline side slitting system trims film edges and collects the scrap on takeup mandrels for easy cleanup.
- ❑ Belt registration table accurately guides sheets and ensures straight, consistent cuts.
- ❑ Digital control panel for precision adjustments and reduced waste.
- ❑ Working width of up to 20" accommodates virtually all digital prints.
- ❑ Inline guillotine cutter is accurate to within 1/16."
- ❑ Compatible with all types of thermal laminating films including PET, OPP and PVC.



**Made in the USA**

The above information is presented for reference and illustration of general product characteristics only. The information does not constitute a representation or warranty relating to the suitability or fitness for a particular application or otherwise create guarantees of product performance. All material should be tested by purchaser to determine final suitability.


## Technical Specifications

|                      |                         |                             |
|----------------------|-------------------------|-----------------------------|
| Dimensions:          | 3.5'W x 8.25'L x 5'H    | 106.7cm x 251.5cm x 152.4m  |
| Electrical:          | 230 Volt 30 amp 1 phase | 230 Volt 30 A 1 phase       |
| Air:                 | 8 cfm                   | 0.23 m <sup>3</sup> /minute |
| Warmup Time:         | 20 Minutes              | 20 Minutes                  |
| Maximum Temp         | 300°F                   | 149°C                       |
| Speed                | Up to 20fpm             | 6 m/minute                  |
| Min. Sheet Size:     | 8 ½" x 11"              | 21.6cm x 27.9cm             |
| Max Sheet Size:      | 20" x 25"               | 50.8cm x 63.5cm             |
| Min Sheet Thickness: | 80 lb. Text             | 115g/m <sup>2</sup>         |
| Max Sheet Thickness: | 24 pt. Board            | 350g/m <sup>2</sup>         |

## Available Options

Takeup Mandrel for Inline Slitting

## Foot Print

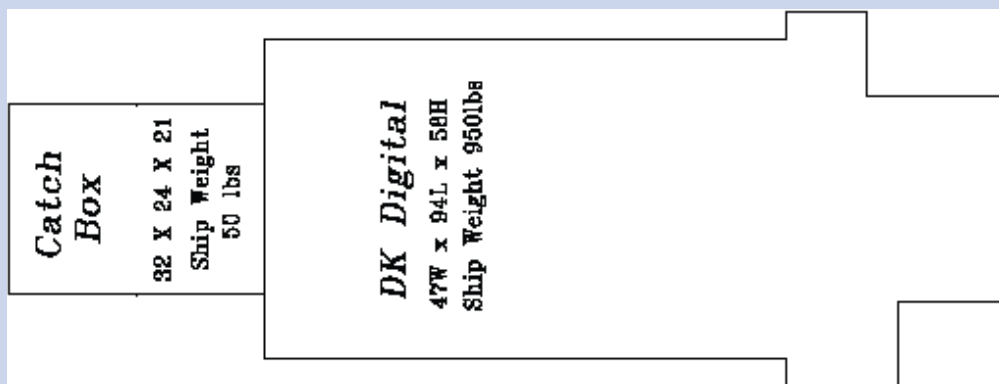

## Feeder

The sheet feeder is capable of handling stocks from letter size (8.5" x 11") up to 20" x 25." The feeder includes a pivoting belt table that swings up for easy film access and quick machine setup.

## Laminator

The Double Kote Digital warms up in 20 minutes for two sided digital lamination projects of all types. An integrated fan bank quickly cools down hot films as they exit the laminator for clean cutting and easy handling. A single operator can make simple, precision adjustments for perfectly finished products.

## Cutter

A heavy duty guillotine cutter is located directly behind the laminator for front and back edge trimming. Side slitters can also be used along with an optional scrap takeup mandrel to cut laminated sheets to their final size.

Visit [www.dkgroup.com](http://www.dkgroup.com) for videos and more information on the Double Kote Digital

D&K Group Inc.  
1795 Commerce Drive  
Elk Grove Village, IL, 60007

P: 800.632.2314  
F: 847.956.8214  
[www.dkgroup.com](http://www.dkgroup.com)

