






# AutoKote Pro


Narrow Format

Equipment


The AutoKote Pro offers a fully automated laminating solution with a small footprint. The AutoKote Pro includes a sheet feeder, one-sided laminator, and diagonal cutter all on a compact frame. This operator-friendly system makes lamination fast and simple with a digital control panel for easy job setup and operation. The innovative diagonal cutter is also capable of separating thick laminating films that other compact bursting systems cannot process.

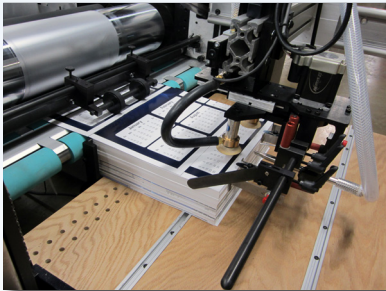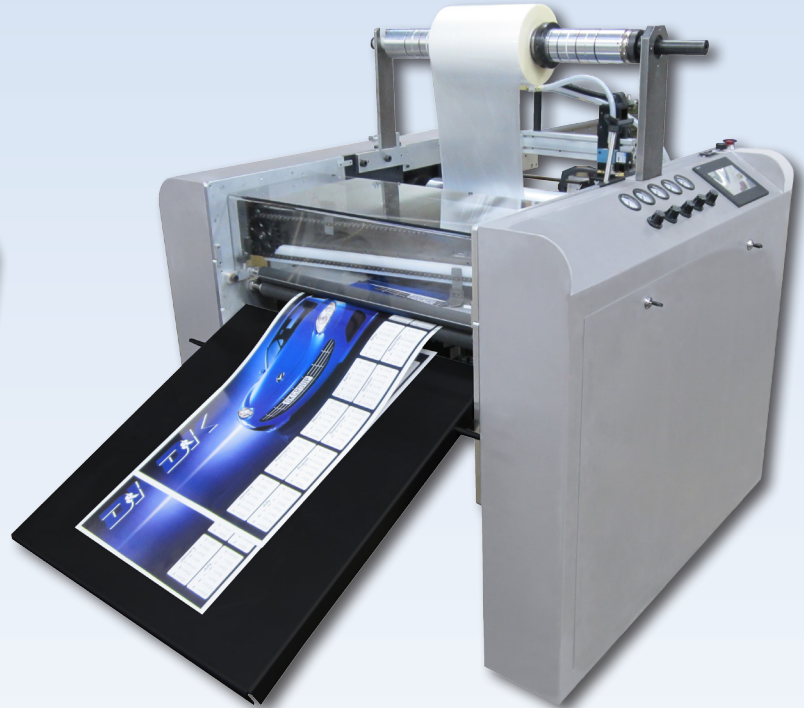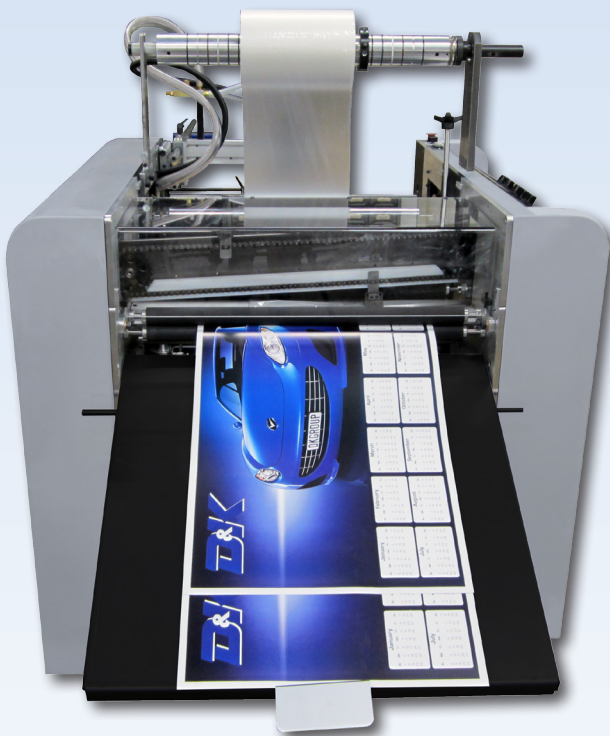


Automatic Sheet Feeder

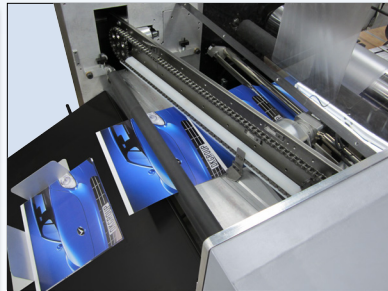

Diagonal Cutter

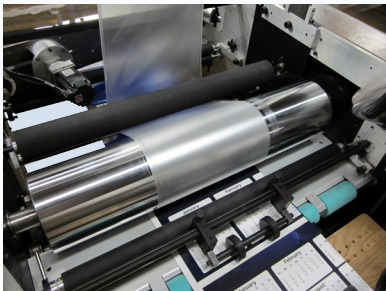

Heated Chrome Roller With High Release Silicone Nip Roller

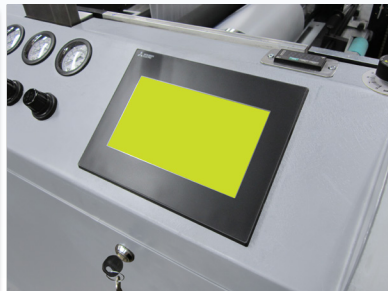

Large Touch Screen Controls



**Made in the USA**


- ❑ Compact design conserves valuable floor space.
- ❑ Features a large digital touch pad control for easy setup and precision adjustments.
- ❑ Diagonal cutter cleanly separates prints without frayed edges, even with films thicker than 1.3 mil.
- ❑ Swing-out feeder system provides easy access to sheet stacks during initial setup and reloading.
- ❑ Handles sheets from 8 1/2" x 11" up to 26" wide by 30" long at speeds up to 50 fpm.
- ❑ Curl management system places film on the paper in a relaxed manner for a flat finished product.
- ❑ High release silicone nip roller helps prevent film wraparounds and allows for easy maintenance.
- ❑ Requires only one operator from start to finish.

The above information is presented for reference and illustration of general product characteristics only. The information does not constitute a representation or warranty relating to the suitability or fitness for a particular application or otherwise create guarantees of product performance. All material should be tested by purchaser to determine final suitability.

## Technical Specifications

Dimensions:	108" L x 50" W x 58" H	(275 cm x 127 cm x 147 cm)
Electrical:	230 Volt 30 amp single phase	230 Volt 30 A 1 phase
Air:	6 cfm	(1.6 m <sup>3</sup> /m)
Warmup Time:	20 Minutes	20 Minutes
Temp. Range:	180°F - 300°F	(70°C - 140°C)
Speed:	Up to 50 fpm	(15m/minute)
Min. Sheet Size:	8 ½" x 11"	(21.6cm x 27.9cm)
Max Sheet Size:	26" x 30"	(66cm x 76.2cm)
Min Sheet Thickness:	80 lb. Text	115g/m <sup>2</sup>
Max Sheet Thickness:	18 pt. Board	350g/m <sup>2</sup>

Foot Print

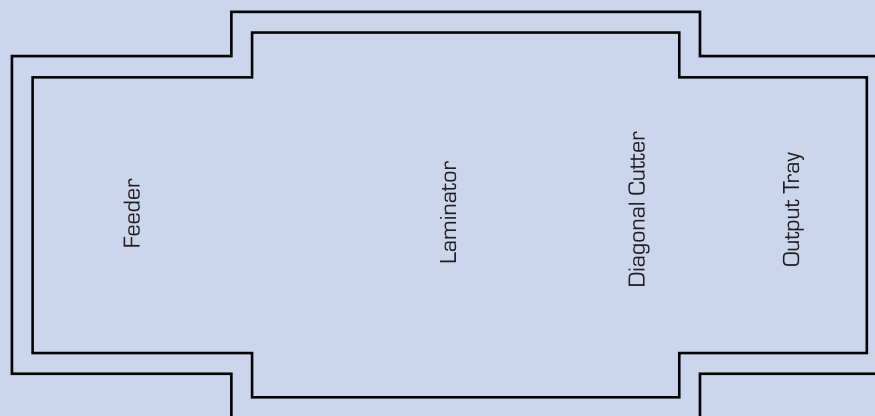

## Feeder

Prints are automatically picked up at the feeder and transported to the laminator. There's no need for an operator to hand feed sheets into the system - simply place a stack of printed material on the feed table and let the machine do the rest. The AutoKote Pro is equipped to handle a wide range of stocks from letter size up to 26" x 30."

## Laminator

Unlike many other compact laminators, the AutoKote Pro is capable of processing films thicker than 1.3 mil. The laminator's large digital touch screen provides accurate heat and nip pressure control, perfect for even the toughest offset and digital prints. A patented curl management system places the film on the paper in a relaxed manner for a perfectly flat finished product. The laminator also features a high release silicone nip roller that helps prevent film wraparounds and allows for quick cleanup and easy maintenance.

## Diagonal Cutter

The diagonal cutter offers complete sheet separation without bursting. Physically cutting sheets with a blade instead of bursting offers the ability to process thick films that many other compact systems can't handle. The cutter is also compatible with polyester films and will not result in frayed edges that make stacking and registering sheets difficult.